


RILIEVO MISURE CASSAMATTA SCONOSCIUTA

Mod.srm Rev.00

COMMITTENTE						DESTINAZIONE				DATA ORDINE					
										DATA CONSEGNA (ORIENTATIVA)					
										RESPONSABILE					
ALLESTIMENTO	LUCE NETTA	*ANTA GRANDE		QUANTITA'		RIVESTIMENTO				PARAS.	APERT. PARZ.	MANIGLIERIA	CILINDRO EUROPEO	RIFERIMENTO	
MODELLO	L=	L=		DX		INT					SI	SI	ALLUMINIO CROMO SATINATO	DOM	
	H=	H=		SX		EST					NO	NO	ALLUMINIO OTTONE LUCIDO	CORBIN	
													ALLUMINIO BRONZATO	CISA+POMO	
DESCRIZIONE EXTRA															

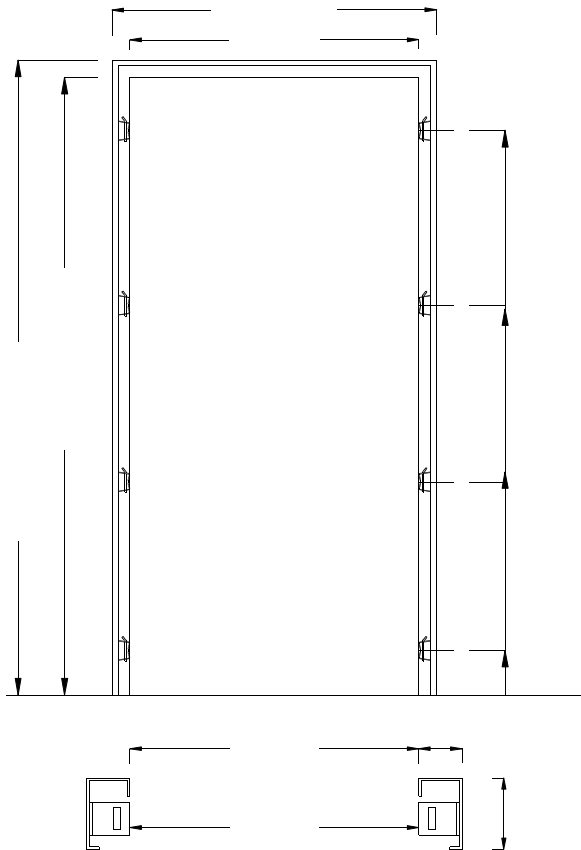

NOME DITTA PRODUTTRICE DELLA CASSAMATTA			
MISURA LUCE NETTA DELLA PORTA ORIGINALE			
NOME E CELLULARE DI CHI HA FATTO I RILIEVI			
SPAZIO RISERVATO AL RIESAME INTERNO	MISURE STANDARD DI PORTE BLINDATE		
	LARG. ALT.	LARG. ALT.	LARG. ALT.
	LUCE NETTA	80 x 210	85 x 210
LUCE LORDA	93 x 217	98 x 217	103 x 217
<p>The diagram shows a cross-section of the door frame with dimensions: 65mm for the inner opening, 70mm for the outer opening, and 65mm for the handle height. It also shows the handle placement for 'APERTURA DESTRA' and 'APERTURA SINISTRA' from both 'LATO ESTERNO' and 'LATO INTERNO'. A note indicates 'P.F. = PIANO FINITO'.</p>			
RESPONSABILE COMMERCIALE			

